


Club Light Show

- Take the bases and trussing out of the bag.
- Take one of the two club light show bars and secure it on top of the trussing with the clamps
- Take a white wire snake it plug it into the two lights and the mega bar
- If the party comes with black lights, use the clamp that is in the middle of the white bar to secure the black light using the wingnut. Use a jumper cable from the mega bar to the black light for power
- Repeat for the other set of lights on the other truss.
- Use a block plug at the bottom of the wire snake and plug in the mega bar and the two lights.
- Lift the trussing up on the other piece of truss that is secured on the base and use two black screws located in the plastic accessories case
- Open and turn on the laptop



Club Light Show Pg2

- Plug in the Showxpress dongle to the computer and plug the other end into the tan junction box.
- Run each DMX cord from the Club light show and mega bar to the junction box (total of 2)
- Do this for both sides of the DJ booth
- On the laptop, open Showxpress
- Make sure the "Live" tab is selected
- There will be a drop down menu where you can select "Club Light Show Movements" and "Club Light Show Programs".
- Select a program and the lights should start working.
- Below the "Movements" button, Select "mega bars" and choose a color. This should turn the mega bar on the light show on.

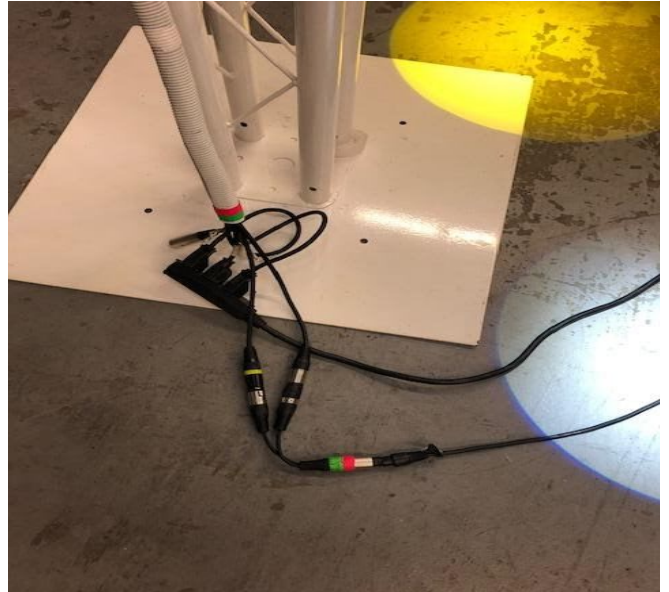

Finished Product:

